

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number  
**WO 2004/002542 A1**

(51) International Patent Classification<sup>7</sup>: **A61L 9/03**,  
A01M 1/20, H01C 7/02, 7/00

**Robert [ZA/GB]; Reckitt Benckiser (UK) Limited**, Dansom Lane, Hull, HU8 7DS (GB).

(21) International Application Number:  
PCT/GB2003/002801

(74) Agents: **MCKNIGHT, John, Crawford et al.**; Reckitt Benckiser plc, Group Patents Department, Dansom Lane, Hull HU8 7DS (GB).

(22) International Filing Date: 1 July 2003 (01.07.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0215145.4 1 July 2002 (01.07.2002) GB

(71) Applicant (*for all designated States except US*):  
**RECKITT BENCKISER (UK) LIMITED** [GB/GB];  
103-105 Bath Road, Slough, Berkshire SL1 3UH (GB).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **MEYER, Brian**,

[Continued on next page]

(54) Title: ELECTRICALLY HEATED VAPOUR DISPENSING APPARATUS

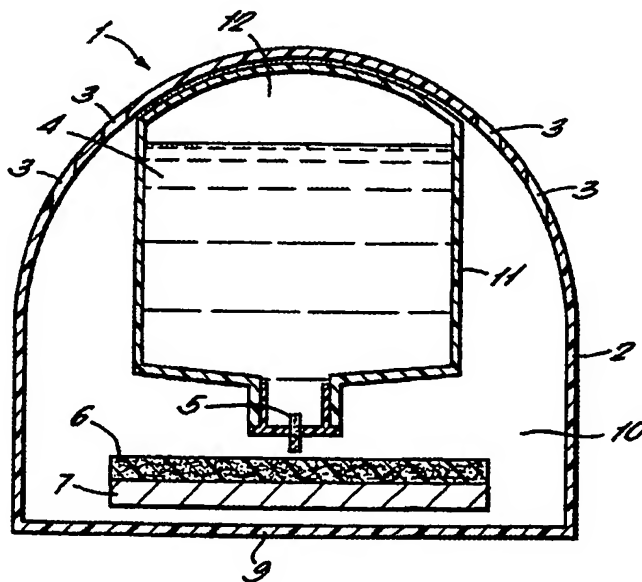

(57) Abstract: An electrically heated apparatus (1) for dispensing fragrancing materials and other volatile substances to an enclosed volume comprising a container (11) containing a quantity of a volatile substance (14), heating means (7), transfer means (5) for transferring said volatile substance towards said heating means (7) and a portable power supply for energising said heating means, characterised in that said heating means (7) comprises a flexible thin film heater.

WO 2004/002542 A1

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU,

TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**ELECTRICALLY HEATED VAPOUR DISPENSING APPARATUS**

The present invention relates to an electrically heated vapour dispensing apparatus of the type commonly used for dispensing fragrancings materials and other volatile substances to an enclosed volume such as the interior of a room.

Electrically heated vapour dispensing apparatus of different types are known in the art. For example, GB 2 117 639 describes an air freshening device of the type which is plugged into an electrical mains socket. Whilst such "plug-in" apparatus provide a satisfactory volatilisation of fragrance, they have a number of disadvantages. Firstly, the devices must be plugged into an electrical socket in order to operate. Consequently, the electrical socket is unavailable for other uses. Secondly, the heating elements used in the apparatus need to operate continuously otherwise there is a performance drop. Consequently, the apparatus uses a large amount of electrical energy. In addition a user is prone to become 'habituated' to the fragrance - a phenomenon whereby exposure to a continuous presence of a fragrance leads one to become desensitised to the fragrance with the result that one can no longer detect the presence of the fragrance. Thirdly, such apparatus cannot be used where electrical mains sockets are not available, for example, in bathrooms, out-houses, etc. Fourthly, the majority of electrical mains sockets are located at or near ground level where the socket may be difficult to access or is obscured by items such as furniture. Locating the apparatus at or near ground level is not always considered ideal from an aesthetic consideration or for

2-

maximising the efficient volatilisation and diffusion of the fragrance in the enclosed volume of the room.

Attempts have been made to provide an electrically heated vapour dispensing apparatus which operates from a portable power supply, such as batteries. However, such apparatus suffer from two main drawbacks. Firstly, they are under-powered such that they have difficulty in heating the fragrance or other volatile substance to the required temperature, as well as heating the volatile substance sufficiently rapidly. Secondly, batteries are not able to volatilise the fragrance for a long enough period to be acceptable to consumers. With many conventional apparatus the operating life of a battery power source would be only a matter of hours.

According to the present invention, there is provided an electrically heated apparatus for dispensing fragrancing materials and other volatile substances to an enclosed volume comprising a container containing a quantity of a volatile substance, heating means, transfer means for transferring said volatile substance towards said heating means and a portable power supply for energising said heating means, characterised in that said heating means comprises a flexible thin film heater.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:-

Figure 1 is a schematic cross-sectional view through a first embodiment of electrically heated vapour dispensing apparatus according to the present invention;

Figure 2 is a schematic cross-sectional view through a second embodiment of electrically heated vapour dispensing apparatus according to the present invention;

3 -

Figure 3 is a schematic cross-sectional view through a third embodiment of electrically heated vapour dispensing apparatus according to the present invention;

Figure 4 is a schematic cross-sectional view through  
5 a fourth embodiment of electrically heated vapour dispensing apparatus according to the present invention;

Figure 5 is a plan view of a heating means for use in the apparatus of Figure 1 to 4; and

Figure 6 is a cross-sectional view of the heating  
10 means taken on line VI-VI of Figure 5.

Figure 1 shows a first embodiment of electrically heated vapour dispensing apparatus 1 which comprises a housing 2 containing a fragrance reservoir 4, a capillary tube 5, a porous element 6, heating means 7, control  
15 circuitry (not shown) and a portable power supply (not shown).

The housing 2 has a planar base 9 allowing the apparatus 1 to be stood upright on a flat surface. The housing 2 defines an interior 10 of the apparatus 1 in  
20 which the other components of the apparatus 1 are located. At or near an upper end of the housing 2 are provided a number of air holes 3 providing communication between the interior 10 and the surrounding atmosphere. The air holes 3 allow volatilised fragrance to emanate  
25 from the interior 10.

The housing 2 may be formed from a thermoplastic or thermosetting polymeric material which has sufficient heat tolerance such that it is not undesirably softened or melted when the heating means 7 is energised during  
30 normal use of the apparatus 1. Typical examples of known materials which would be suitable include polymers and/or co-polymer resin compositions based on:- nylons,

4 -

polyethylene terephthalate, polybutylene terephthalate, polyolefins, styrenes, polyacetal resins, polysulfones as well as other materials which exhibit the desired heat tolerance properties as noted above. As is well-known in the art, the polymeric compositions may include additives or modifiers such as fillers, fire retardant materials, colourants, pigments, etc. Preferably, the housing is formed in an injection moulding process. Further, the housing 2 may be formed from glass.

10       The fragrance reservoir 4 is mounted in the interior of the apparatus 1 and comprises a reservoir body 11 defining a closed volume 12 in which is stored a volume of the fragrance 14 to be volatilised. The fragrance 14 is typically a volatile liquid composition.

15       A lower end of the reservoir body 11 narrows to form a neck portion 13 in which is located the capillary tube 5. The capillary tube 5 provides the sole outlet for the fragrance 14 to exit the reservoir 4.

20       The porous element 6 is located immediately below and in contact with the outlet of the capillary tube 5. The porous element 6 may take various forms and shapes. The porous element 6 may be a porous polymeric material such as a sintered polymeric material or a porous ceramic material. Suitable materials include the range of porous plastics produced by Porex® (Fairbairn, Georgia, U.S.A.).  
25       Alternatively, the porous element 6 may be a fibrous material such as a block, pad or sponge of compressed, woven or non-woven fibrous material. Exemplary fibrous materials include naturally occurring synthetic fibrous  
30       materials as well as blends of two or more such fibrous materials.

5 -

The heating means 7 is located underneath the porous element 6 and in register therewith. In accordance with the present invention, the heating means 7 is a flexible, thin film heater. The thin film heater 7 is attached to  
5 the lower surface of the porous element 6 or otherwise held in contact therewith such that the porous element 6 is interposed between the capillary tube 5 and thin film heater 7.

As shown in Figures 5 and 6, the thin film heater  
10 comprises a laminate of three layers: an upper layer 21 of insulating material, a lower layer 23 of insulating material and an intermediate layer 22 of resistive material. The intermediate layer 22 of resistive material may be formed from a PTF material (polymer thick  
15 film) which preferably has PTC characteristics (positive co-efficient temperature) such that as the temperature of the resistive material 22 increases, the electrical resistance of the material also increases thus limiting the danger of over-currents and damage to the resistive  
20 material 22 and surrounding apparatus 1. The resistive material 22 is provided with contact portions 24 and 25 of conductive material to allow the resistive material 22 to be connected as part of an electrical circuit.

The resistive material 22 of the thin film heater 7  
25 may be formed from a resistive ink or a resistive wire or a combination of the two. Resistive ink films are available from Hydor. Resistive wire films are available from Mintco. The ink and/or wire is laid down in thin layers of the order of 40 to 50 microns on the flexible  
30 substrate of the insulating layers 21 and 23.



6 -

Advantageously, the resistive material 22 displays a very rapid thermal response on energisation. The time required for the resistive material 22 to reach an operating temperature of approximately 70 degrees Celsius is in the order of one to two seconds. In addition the cooling time of the film is equally rapid. Consequently, the thin film heater 7 is able to deliver a precise quantity of heat energy to the porous element 6 which allows for precise volatilisation of the fragrance 14.

10 The operating temperature of the heater 7 can be adjusted depending on the nature and characteristics of the substance to be volatilised. For fragrances, typical temperatures are in the range 40 to 90 degrees Celsius, more preferably, 60 to 80 degrees Celsius. For other

15 substances such as insecticides higher temperatures may be required: in the range 100 to 160 degrees Celsius, more preferably 120 to 140 degrees Celsius, typically 130 degrees Celsius.

An important advantage of using a thin film heater as described above is that the heater may be formed as a flexible element and does not require a rigid substrate. Consequently, the thin film heater 7 may be manipulated to fit into a small volume and/or be positioned to accommodate other components within the interior 10 of the apparatus 1. As such, the use of a thin film flexible heater allows for a smaller overall volume of apparatus 1. The use of a flexible heater also allows the spatial relationship of the heater 7 and porous element 6 or other fragrance-bearing element to be easily

25

30 adjusted in order to maximise thermal efficiency as described below in subsequent embodiments.

The portable power supply preferably comprises a battery cell or cells. The batteries may, for example, be of the alkaline, lithium-ion or Ni-Cad type. The batteries may be disposable or rechargeable. The  
5 batteries may be rechargeable in situ by, for example, a solar cell or may be removable from the housing 2 to allow recharging by connection to a mains electrical supply.

Control circuitry is provided in housing 2. The  
10 control circuit includes a switch and a timer. The switch operates to open and close an electric circuit comprising the portable power supply and thin film heater 7 and hence controls flow of electric current around the electrical circuit. Consequently, the switch controls  
15 energisation of the heater 7 and fragrance volatilisation. The switch is operated by the timer. The timer can be pre-programmed to open and close the switch at specified times or to open and close the switch for set periods and at set intervals. For example, the  
20 apparatus 1 can be switched on for periods ranging between one second and five minutes or more. Preferably, each period is between one second and one minute. Alternatively, each period is between one second and ten seconds. Alternatively, each period is between one second  
25 and five seconds.

Alternatively the timer may be programmed on demand by the user. For example, a selector switch may be provided to allow the user to adjust the period of energisation or the interval length between  
30 energisations. The switch may also be opened and held opened by the user manually so as to place the apparatus

8 -

1 in an 'off' state. Alternatively a secondary, 'master', switch may be provided for this purpose.

An important advantage of using a switch and timer is that the overall power requirement of the apparatus is reduced. This in turn allows the useful life of the apparatus 1 to be extended by increasing the length of time for which the apparatus 1 can operate between battery replacement or recharge. An added advantage is that habituation to the fragrance is reduced since the fragrance is volatilised only for discrete periods and not continuously.

In use, a user switches the apparatus 1 on using the switch or master switch. Fragrance 14 from the reservoir 4 is drawn by capillary action down capillary tube 5 where it contacts and impregnates the porous element 6. The control circuit passes electric current from the battery to the thin film heater 7 as and when the timer operates the switch to close the electric circuit. On energisation, the thin film heater 7 rapidly heats up to its operating temperature. Heat energy is passed from the thin film heater 7 to the porous element 6 by conduction. Consequently, the porous element 6 heats up leading to volatilisation of fragrance 14 impregnated therein. The volatilised particles of fragrance then emanate through the air holes 3 into the surrounding atmosphere. Once the programmed energisation period has expired the control circuitry opens the switch turning the heater 7 off. The thin film heater 7 rapidly cools leading to rapid cessation of fragrance emanation.

Figure 2 shows a second embodiment of apparatus 1 according to the present invention. As before, the apparatus 1 comprises a housing 2 having air holes 3, a

fragrance reservoir 4, control circuitry (not shown), portable power supply (not shown) and a thin film heater 7. The second embodiment is distinguished from the first embodiment by the means of delivering the fragrance 14  
5 into the vicinity of the thin film heater 7. A wick 30 is provided which extends externally from within the interior 12 of the fragrance reservoir 4. An upper end 31 of the wick 30 passes through an aperture 33 in the reservoir body 11 and extends therefrom. The thin film  
10 heater 7 is attached of held in contact with the upper end 31 of the wick 30. A capillary film may be used in substitution for the wick 30.

In use, operation of the portable power supply, control circuitry and thin film heater 7 is as described  
15 above with reference to the first embodiment. Fragrance 14 is wicked upwardly from within the reservoir 4 towards the upper end 31 of the wick 30. Energisation of the thin film heater 7 causes volatilisation of the fragrance which is then emanated though the air holes 3.

20 Advantageously, no capillary tube is required.

Figure 3 shows a third embodiment of apparatus 1 according to the present invention. As before, the apparatus 1 comprises a housing 2 having air holes 3, a fragrance reservoir 4, control circuitry (not shown),  
25 portable power supply (not shown) and a thin film heater 7. The third embodiment is distinguished from the previous embodiments by the means of delivering the fragrance 14 into the vicinity of the thin film heater 7. A wick 40 is provided which extends externally from  
30 within the interior 12 of the fragrance reservoir 4. An upper end 41 of the wick 40 passes through an aperture 43 in the reservoir body 11 and extends therefrom. The wick

40 is cylindrical in shape and hollow. The wick 40 is preferably formed from a porous polymeric material or fibrous material. Suitable types of materials include those described above with reference to the porous  
5 element 6 of the first embodiment. The thin film heater 7 is attached of held in contact with the upper end 41 of the wick 40. Advantageously, the thin film heater 7 is formed as an elongate strip which is wrapped around an external surface of the cylindrical wick 40 in a spiral  
10 arrangement. This serves to maximise the surface area of the wick 40 in proximity to the thin film heater 7 whilst minimising the quantity of resistive material 22 in the heater 7 and hence minimise the power requirements of the apparatus 1.

15 Operation of the third embodiment is the same as that of the embodiments described above.

Figure 4 shows a fourth embodiment of apparatus 1 according to the present invention. The fourth embodiment is similar to the third embodiment and in particular the  
20 wick 40 is in the form of a hollow cylindrical wick. The thin film heater 7 is inserted into a bore 44 of the wick 40 such that the heater 7 is surrounded by wick material. Advantageously heat generated by the heater 7 is efficiently conducted to the wick 40 due to the wick 40  
25 forming a barrier such that the heat energy cannot easily emanate other than by conduction through the wick 40.

Whilst in the foregoing description the apparatus 1 has been described for use in volatising fragrance, it is to be understood that the apparatus is equally suitable  
30 for the volatilisation of other volatile substances which are desired to be emanated including, but not limited to, perfumes, disinfecting compositions and insecticides.

Whilst in the foregoing description the fragrance 14 has been typified as a liquid composition, other compositions may be utilised. These include gels, pastes and thixotropic liquids, as well as combinations of the same. The fragrance 14 may further comprise a liquid composition adsorbed onto a carrier element such as silica. The fragrance 14 may, in addition, be a bi-phase or multi-phase fragrance.

Whilst in the foregoing description the apparatus 1 has been described as for use with compositions such as fragrances, the apparatus may also be readily used in medical application for dispensing, for example, metered dosing of compounds such as aromatherapy compositions.

Whilst in the foregoing description the control circuitry has been described as switching the thin film heater 7 from an off state to an energised state the control circuitry can also be programmed to switch the thin film heater 7 from a 'low power' state to a 'high power' state. Thus constant emanation of the volatile substance is achieved with the heater 7 in the low power setting whilst fragrance emanation is boosted at set intervals when the heater 7 is switched to the high power setting. This embodiment is advantageous where a strong fragrance presence is required.

## Claims:

1. An electrically heated apparatus for dispensing  
fragrancing materials and other volatile  
5 substances to an enclosed volume comprising a  
container containing a quantity of a volatile  
substance, heating means, transfer means for  
transferring said volatile substance towards said  
heating means and a portable power supply for  
10 energising said heating means, characterised in  
that said heating means comprises a flexible thin  
film heater.
2. Electrically heated apparatus as claimed in claim  
15 1 wherein said thin film heater comprises a  
laminar of resistive material.
3. Electrically heated apparatus as claimed in claim  
20 2 wherein the resistive material is a polymer  
thick film material or a polymer thin film  
material.
4. Electrically heated apparatus as claimed in claim  
25 2 or claim 3 wherein the resistive material has  
positive temperature coefficient characteristics.
5. Electrically heated apparatus as claimed in any  
of claims 2 to 4 wherein the thin film heater  
comprises a laminate having at least one laminar  
30 of resistive material and at least one laminar of  
insulating material.

13 -

6. Electrically heated apparatus as claimed in claim 5 wherein the laminate comprises two insulating laminars attached to opposed surfaces of the resistive material laminar.
- 5 7. Electrically heated apparatus as claimed in any of claims 2 to 6 wherein the resistive material is formed at least partially from resistive ink.
- 10 8. Electrically heated apparatus as claimed in any of claims 2 to 7 wherein the resistive material is formed at least partially from resistive wire.
- 15 9. Electrically heated apparatus as claimed in claim 7 or claim 8 wherein the laminar of resistive material is formed from one or more layers of resistive ink and/or resistive wire each layer having a thickness of between 10 and 1000 microns.
- 20 10. Electrically heated apparatus as claimed in claim 7 or claim 8 wherein the laminar of resistive material is formed from one or more layers of resistive ink and/or resistive wire each layer
- 25 having a thickness of between 10 and 100 microns.
- 30 11. Electrically heated apparatus as claimed in claim 7 or claim 8 wherein the laminar of resistive material is formed from one or more layers of resistive ink and/or resistive wire each layer having a thickness of between 20 and 50 microns.



14-

12. Electrically heated apparatus as claimed in any preceding claim wherein the thin film heater has an overall thickness of between 20 and 1000 microns.
- 5 13. Electrically heated apparatus as claimed in any preceding claim wherein the thin film heater has an overall thickness of between 40 and 100 microns.
- 10 14. Electrically heated apparatus as claimed in any preceding claim wherein the portable power supply comprises one or more battery cells.
- 15 15. Electrically heated apparatus as claimed in claim 14 wherein the battery cell or cells are rechargeable.
- 20 16. Electrically heated apparatus as claimed in any preceding claim wherein said transfer means comprises a capillary tube.
- 25 17. Electrically heated apparatus as claimed in any of claims 1 to 15 wherein said transfer means comprises a wick or capillary film.
18. Electrically heated apparatus as claimed in claim 17 wherein said heating means is attached to or held in proximity to said wick or capillary film.

30

15 -

19. Electrically heated apparatus as claimed in claim 18 wherein said heating means is located at least partially within said wick.
- 5 20. Electrically heated apparatus as claimed in claim 19 wherein said wick is cylindrical and said heating means is located in a bore of the cylinder.
- 10 21. Electrically heated apparatus as claimed in claim 18 wherein said heating means is wrapped at least partially around an outer surface of said wick.
- 15 22. Electrically heated apparatus as claimed in any preceding claim further comprising timing means operable to energise said heating means periodically.
- 20 23. Electrically heated apparatus as claimed in claim 22 wherein the periodicity is pre-programmed.
24. Electrically heated apparatus as claimed in claim 22 wherein the periodicity is user defined.
- 25 25. Electrically heated apparatus as claimed in any of claims 22 to 24 wherein each period of energisation is for between 1 second and 5 minutes.
- 30 26. Electrically heated apparatus as claimed in any of claims 22 to 24 wherein each period of

16 -

energisation is for between 1 second and 1 minute.

- 5           27. Electrically heated apparatus as claimed in any  
of claims 22 to 24 wherein each period of  
energisation is for between 1 second and 10  
seconds.
- 10           28. Electrically heated apparatus as claimed in any  
of claims 22 to 24 wherein each period of  
energisation is for between 1 second and 5  
seconds.
- 15           29. Electrically heated apparatus as claimed in any  
preceding claim further comprising timing means  
operable to switch said heating means  
periodically from a low power state to a high  
power state.
- 20           30. Electrically heated apparatus substantially as  
hereinbefore described with reference to or as  
shown in the accompanying drawings.

25

30

1/2






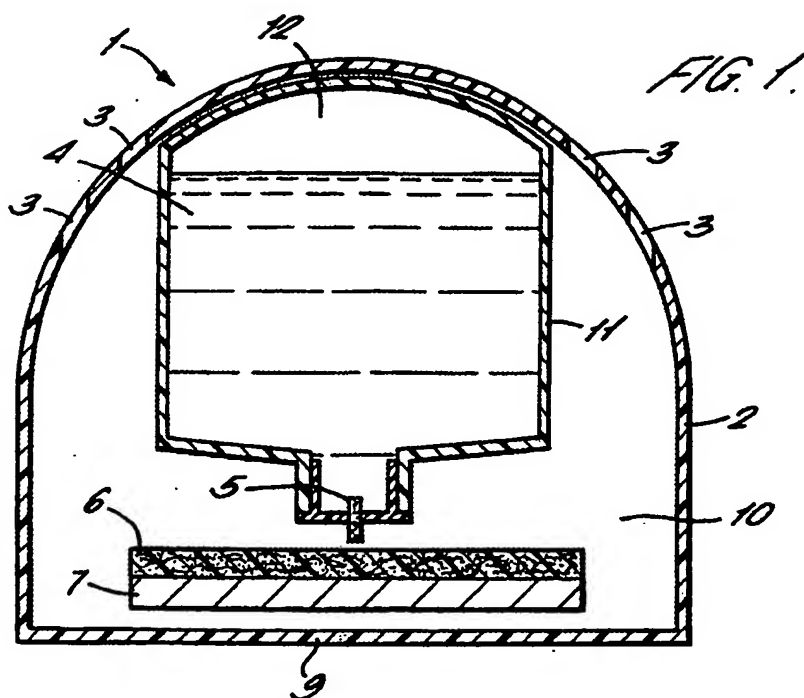


FIG. 2.

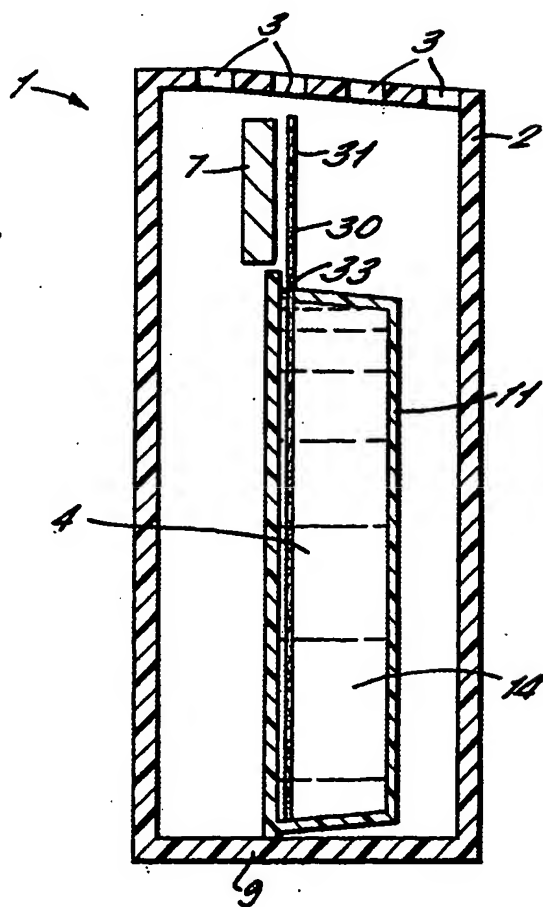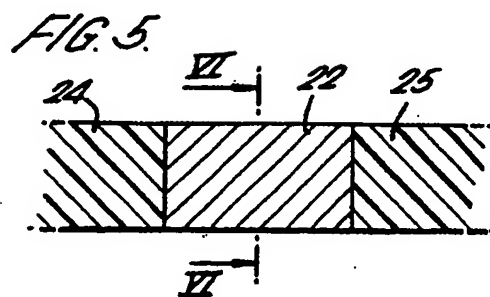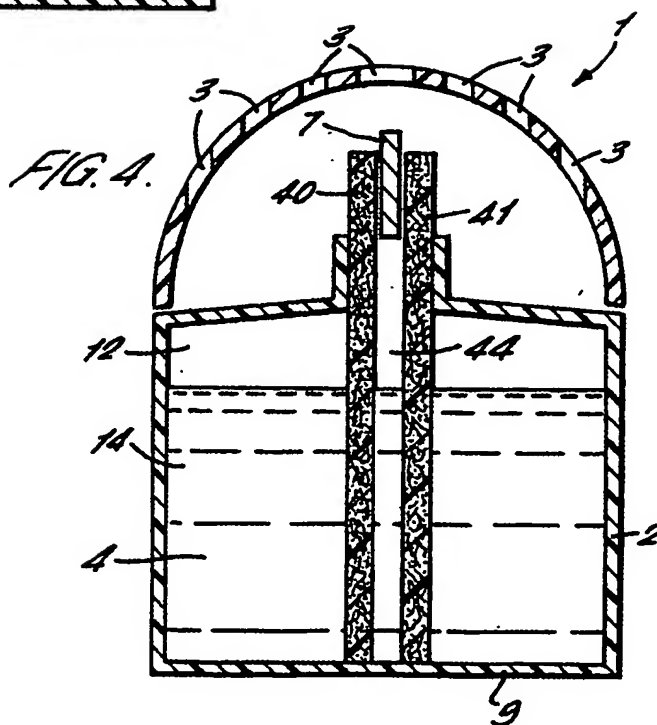

2/2

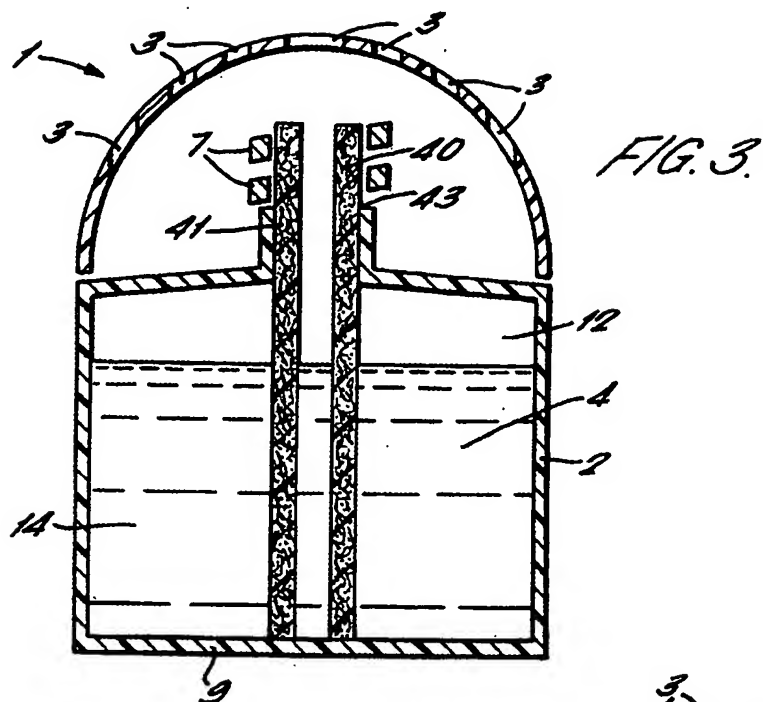

# INTERNATIONAL SEARCH REPORT

Int l Application No  
PCT/GB 03/02801

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61L9/03 A01M1/20 H01C7/02 H01C7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61L A01M H01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 644 866 A (KATSUDA YOSHIO ET AL) 8 July 1997 (1997-07-08)	1-6,14, 15,17, 18,30
Y	the whole document	7,9-12, 16, 21-24,29
X	GB 2 347 860 A (PANKHURST DESIGN & DEVELOPMENT) 20 September 2000 (2000-09-20) the whole document	1,2,8
X	WO 01 39809 A (RYMER SHAUN ;RECKITT BENCKISER UK LTD (GB)) 7 June 2001 (2001-06-07) page 6, line 6 - line 12; claim 1	1,2,8
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*A\* document member of the same patent family

Date of the actual completion of the international search

16 September 2003

Date of mailing of the international search report

24/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Marti, P

# INTERNATIONAL SEARCH REPORT

Int'l Application No  
PCT/GB 03/02801

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 46283 A (JOHNSON & SON INC S C) 22 October 1998 (1998-10-22) page 7, line 22 - line 27 ----	7
Y	US 4 977 309 A (UCHIDA KATSUYUKI) 11 December 1990 (1990-12-11) the whole document ----	9-12
Y	GB 2 357 973 A (RECKITT BENCKISER ; RECKITT & COLMANN PROD LTD (GB)) 11 July 2001 (2001-07-11) the whole document ----	16, 21-24, 29
A	US 5 574 821 A (BABASADE WOLFGANG) 12 November 1996 (1996-11-12) column 2, line 26 -column 3, line 2 -----	1-30

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/02801

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5644866	A	08-07-1997	JP 8023851 A AT 408405 B AT 119595 A AU 687200 B2 AU 2502395 A BR 9503318 A CA 2153821 A1 CN 1133119 A , B DE 19525782 A1 FR 2722368 A1 GR 1002378 B IT RM950485 A1 KR 137490 B1 PT 101738 A , B	30-01-1996 26-11-2001 15-04-2001 19-02-1998 25-01-1996 09-07-1996 16-01-1996 16-10-1996 18-01-1996 19-01-1996 27-06-1996 15-01-1996 25-04-1998 30-04-1996
GB 2347860	A	20-09-2000	NONE	
WO 0139809	A	07-06-2001	GB 2356815 A AU 2186601 A BR 0016108 A CA 2393208 A1 CN 1407904 T EP 1233792 A1 WO 0139809 A1 US 2003007787 A1	06-06-2001 12-06-2001 20-08-2002 07-06-2001 02-04-2003 28-08-2002 07-06-2001 09-01-2003
WO 9846283	A	22-10-1998	US 6123935 A AU 6974498 A WO 9846283 A1 ZA 9803043 A	26-09-2000 11-11-1998 22-10-1998 20-10-1998
US 4977309	A	11-12-1990	JP 1257303 A JP 1891170 C JP 6016442 B DE 3910861 A1	13-10-1989 07-12-1994 02-03-1994 02-11-1989
GB 2357973	A	11-07-2001	NONE	
US 5574821	A	12-11-1996	NONE	